



SNBC BTP-U100t Printer Introduction

SNBC Overseas Marketing Center

Jun. 2017

BTP-U100t

- Brief introduction
- Feature
- Application



■ Brief Introduction

BTP-U100t

- Smart appearance
- Open carbon module, easy operation& maintenance;
- High printing speed
- High reliability



150mm/s]



【127mm】



【30km】




■ Features

SNBC

LP45

125 mm/s

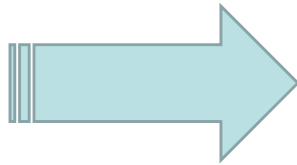

BTP-U100t

150 mm/s




■ Features



Support 2 kinds of ribbon length



■ Features

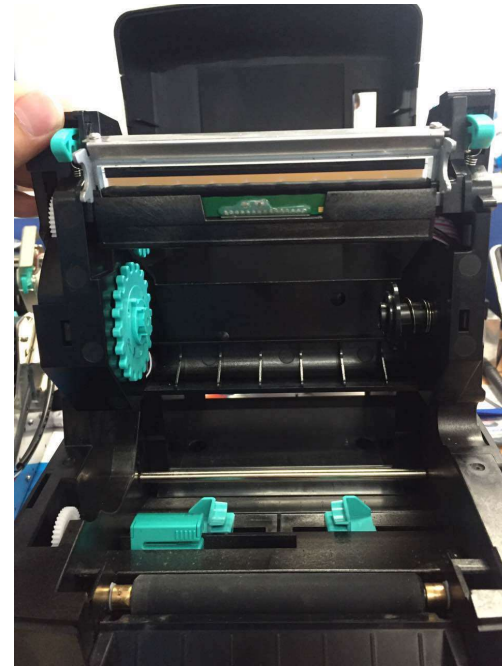

SNBC

Easy operation & maintenance, ribbon can be changed quickly

■ Features

SNBC



Support dual interfaces----USB+Serial

■ Features

Support BPLZ, BPLE and BPLT command set, compatible with current software.

New TPH with high wear resistance

High-power step motor to implement high printing speed

Higher ability of anti-static and anti-interference

■ Software/utilities/drivers/SDKs

- Bartender OEM version
- Configuration tool
- Windows driver for 32bits/64bits OS
- Linux driver for 32bits/64bits OS
- SDK for redevelopment



■ Application



- Health Care**
- Test label
 - Blood bag label
 - Prescription
 - Radiology label




- Manufacturing**
- Product label
 - Package label
 - Clothing tag



- Retail**
- Shelf label
 - Price label



- Consumer Goods/Service**
- Electronics
 - Photo processing label

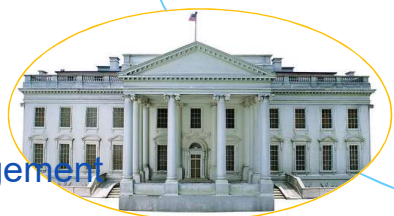

- Government**
- Property management
 - File track



- Transportation/Logistics**
- Shipping/receiving
 - warehouse management
 - Reverse logistics
 - Returning goods

■ SPECIFICATION



ITEM		BTP-U100t	4T200
Print	Resolution	203DPI	203DPI
	Print method	Thermal/Thermal transfer	
	Print width	104mm(Max.)	104mm(Max)
	Print speed	150mm/s(Max.)	110mm/s(Max.)
	Memory	SDRAM: 16MB, FLASH: 4MB	SDRAM: 16MB, FLASH: 8MB
	Interface	Standard: USB, optional: Serial	Only USB
Medium	Paper type	Continuous paper , label paper, mark paper	
	Paper roll OD	127mm(Max.)	
	Paper roll width	19-120mm	19-115mm
	Ribbon length	300m(Max.)	
	Ribbon roll ID	12.7/25.4mm	
Programming language	Command set	BPLT, BPLZ,BPLE	TSPL, EPL, ZPL
Operation interface	Key, LED	1 button, 2 LEDs	1 button, 1 LED
Detection	Sensor	Transmission sensor (movable) , Reflection sensor (movable)	Transmission sensor (fixed) , Reflection sensor (movable)

■ SPECIFICATION



ITEM		BTP-U100t	4T200
Barcode	1D	Code 39, UPCA, UPCE, Interleaved 2 of 5, code 128, EAN13, EAN8, HBIC (39 code with checkout), Codabar, industry CODE25, Code 93, LOGMARS, GS1 Databar, etc.	
	2D	GS1 DataBar, PDF417, MAXICODE, QR code, DataMatrix, GS1 Composite	GS1 DataBar, GS1 DataMatrix, Maxicode, PDF417, QR Code
Software/Driver		Seagull driver, Bartender label software	Labelshop
Power adaptor	Input	AC 100 ~ 240V, 50/60Hz	
	Output	DC 24V, 2.5A	
Environment	Operation environment	+5 ~ 45°C, 20% ~ 90%	+5 ~ 40°C, 25% ~ 85%
	Storage environment	-40 ~ 60°C, 20% ~ 93%	-40 ~ 60°C, 10% ~ 90%
Physical features	Overall size	278mm(L) × 218mm(W) × 185mm(H)	286mm(L) × 211mm(W) × 164mm(H)
	Weight	About 2.3 Kg	About 2.45 Kg



THANK YOU!

Weihai · China -- The most suitable place for residence



山东新北洋信息技术股份有限公司
Shandong New Beiyang Information Technology Co., Ltd

Address: No.126 Kunlun Road, Huancui District, Weihai, China 264203

Tel: +86-631-5675888 +86-631-5673777

Fax: +86-631-5680499 +86-631-5673778

Web: www.newbeiyang.com